

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
30 August 2001 (30.08.2001)

PCT

(10) International Publication Number
WO 01/62114 A1

- (51) International Patent Classification⁷: **A44C 25/00**
- (21) International Application Number: PCT/AU01/00180
- (22) International Filing Date: 22 February 2001 (22.02.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PQ 5778 22 February 2000 (22.02.2000) AU
- (71) Applicant (for all designated States except US): **CHEER-INE GROUP (INTERNATIONAL) PTY LTD** [AU/AU]; ACN 078 510 611, 48th Floor, 2 Quay Street, Haymarket, New South Wales 2000 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WONG, Wai, Kai** [GB/AU]; Penthouse 3, 48th Floor, 2 Quay Street, Haymarket, New South Wales 2000 (AU).
- (54) Title: FLASHING DEVICE
- (74) Agents: **WEBBER, David, Brian** et al.; Davies Collison Cave, 1 Little Collins Street, Melbourne, Victoria 3000 (AU).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

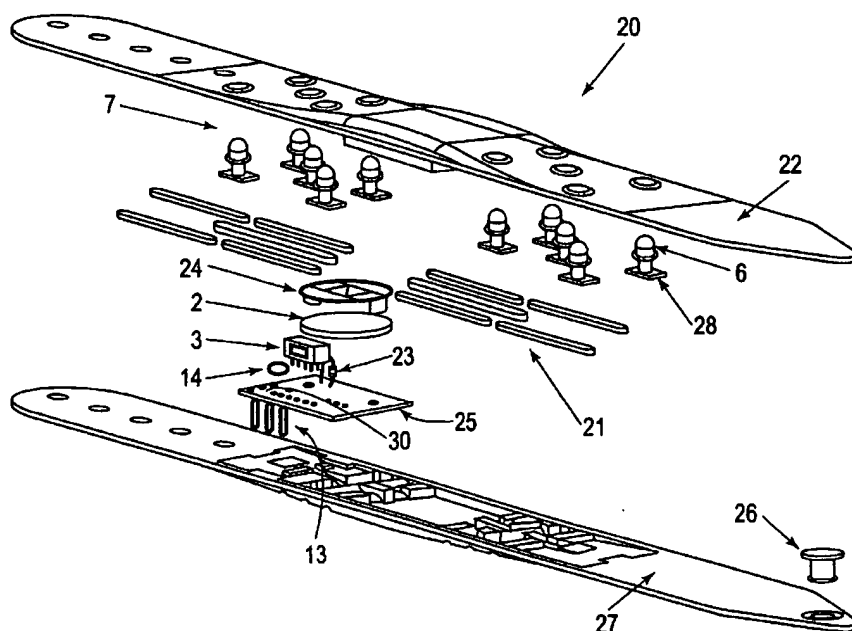

(57) Abstract: A flashing device (20) comprising a wearable band (22, 27) having a motion switch (14) for sensing movement of the band and generating a trigger signal in response to the movement, a circuit (25) responsive to the trigger signal to generate an illumination signal, and at least one light (6, 7) which is illuminated in response to the illumination signal.

WO 01/62114 A1

- 1 -

FLASHING DEVICE

The present invention relates to a flashing device, and in particular to a device for intermittently illuminating a light or lights in accordance with the motion of a body.

5

Visibility is significantly reduced at night and in inclement weather conditions. In such conditions a person's ability to observe pedestrians or a cyclists, especially from a moving vehicle, will be diminished. As a result, the safety of pedestrians and cyclists is compromised.

10

In such conditions it would be advantageous if pedestrians and cyclists used articles of clothing or carried devices which illuminated them or signalled their position. There are several known systems which can perform such a task. One such a system incorporates lights with a shoe in such a way that every time the sole of the shoe is compressed during use a plurality of lights in the shoe illuminate. Such a system has limited utility since the lights are in the shoe, as the lights might not be seen from a distance due to their proximity to the ground. If it was raining, the lights may become submerged in water or covered in mud, thereby rendering the system ineffective for all intents and purposes.

20

A better safety device would be positioned higher on a person's body. This would maximise the distance in which a person could be seen. The higher position would also protect the device from, for example, pools of water and mud. It would also be advantageous to provide a device which can be used to display a person's body motion at spectator events, such as sporting events conducted at night.

25

In accordance with the present invention there is provided a flashing device comprising a wearable band having:

means for sensing movement of the band and generating a trigger signal in response to said movement;

30

circuit means responsive to said trigger signal to generate an illumination signal;

and

- 2 -

at least one light which is illuminated in response to said illumination signal.

Advantageously, the band may be worn on a user's head, neck, waist or arm, and movement of the user will cause the light or lights to flash.

5

Preferably the movement means includes a motion switch having a conducting sphere movable in the space defined by a plurality of conducting rods. Preferably the trigger signal is generated when said sphere moves into contact with at least two of said rods.

10

Preferably the circuit means includes an integrated circuit connected to the motion switch and mounted on a printed circuit board integrated in the band.

Advantageously, the lights may include LEDs distributed on the length of the band.
15 The LEDs may include at least two sets of LEDs which are alternately illuminated when said trigger signal is generated.

A preferred embodiment of the present invention is hereinafter described, by way of example only, with reference to the accompanying drawings wherein:

20

Figure 1 is a circuit diagram of a preferred embodiment of a flashing device; and
Figure 2 is a schematic diagram of components of the flashing device.

A flashing device 1, as shown in the drawings, includes a voltage source 2, a switch 3, an integrated circuit (IC) 4, a motion switch 5, a first plurality of light emitting diodes (LEDs) 6 and a second plurality of LEDs 7.
25

A terminal of the switch 3 is connected to the positive terminal 8 of the voltage source 2, and the other terminal of the switch 3 is connect to the IC 4 through an interface pin 9. The IC 4 is also connected to the negative terminal 10 of the voltage source 2 via an interface pin 11. When the switch 3 is closed the IC 4 will be considered 'on', or in a stand
30 by mode.

- 3 -

The switch 3 may be constructed in such a way that once closed it will remain closed until such a time that the switch is physically opened. An example of such a switch is known as a 'slide switch'.

5

The IC 4 is also connected to the motion switch 5 via another interface pin 12. The motion switch includes four rods 13 (13a, 13b, 13c, 13d) and a sphere 14. The four rods 13 and the sphere 14 are constructed from a material which readily conducts electricity. An exemplary construction material may be steel. The sphere 14 may be a metal ball. The four
10 rods 13 are mounted on a surface 30 in such a way that the rods are substantially perpendicular to the surface 30. The rods 13 are also positioned on the surface 30 in such a way that such that they form the corner points of a two dimensional square. In this configuration two rods 13b 13d which are diagonally opposite in the two dimensional square are connected to the interface pin 12 of the IC 4. The remaining two rods 13a 13c,
15 also diagonally opposite in the two dimensional square, will be connected to the negative terminal 10 of the voltage source 2.

The four mentioned rods 13 are mounted on the surface 30 in such a way that the conducting sphere 14, when placed inside the two dimensional square, can contact any two
20 rods, except for rods which are diagonally opposite, at any given time. The conducting sphere 14 when located in the centre of the two dimensional square does not be contact any rod. The surface 30 on which the rods 13 are mounted allows the sphere 14 to move freely in all directions and does not conduct electricity.

25 The motion switch 5 is said to be in an 'on' state when the conducting sphere 14 contacts two conducting rods and in an 'off' state otherwise. The IC 4 is said to be in a 'stand by' state when the switch 3 is closed and the motion switch 5 is connected and in an off state.

30 The IC 4 is connected via a first output pin 15 to a first plurality of LEDs 6. The LEDs 6 are connected in parallel between a first output pin 15 and the positive terminal 8

- 4 -

of the voltage source 2 via the switch 3. The IC 4 is also connected to a second plurality of LEDs 7 via a second output pin 16. The LEDs 7 are also connected in parallel between the second output pin 16 and the positive terminal 8 of the voltage source 2 via the switch 3.

5 When the motion switch 5 changes state from off to on the voltage at the interface pin 12 changes. The interface pin 12 is now effectively tied to the negative terminal 10 of the voltage source 2. The change of voltage experienced by the interface pin 12 acts as a trigger for the IC 4. After receiving this trigger the IC 4 may then select an output pattern to be displayed and the output pin through which the pattern will be displayed. The IC 4
10 may alternately select between the two output pins to display the pattern.

 When triggered, the IC 4 drives the selected output pin low in order to illuminate the LEDs connected to the pin. By driving the LEDs low the output pin effectively forms a current sink for the LEDs and illuminates them by allowing current to flow from positive
15 terminal 8 of the voltage source 2, via the switch 3, through the LEDs to the current sink.

 The IC 4 after having been triggered will stop illuminating the LEDs after a predetermined period of time. Accordingly, the LEDs are only illuminated or activated on triggering the IC 4, when the motion switch 5 changes state from off to on. The LEDs are
20 therefore triggered when the sphere 14 moves between the rods 13, and causes the motion switch 5 to change state from on to off to on. Alternatively, the LEDs could remain illuminated while the motion switch does not change state.

 In one embodiment of the invention, the first output pin 15 and the second output
25 pin 16 are first and second output ports 15, 16 where each output port comprises a plurality of output pins. Each respective output pin of an output port may be connected to a plurality of LEDs, in parallel, where each respective plurality of LEDs is connected to the positive terminal 8 of the voltage source 2 via the switch 3 to its respective output pin.

30 In this embodiment of the invention, the IC 4 may alternately select an output port to generate an output signal when the motion switch changes state to on. The IC 4 may

- 5 -

also select a pattern to be generated on the selected output port. The chosen pattern will dictate which pins on the output port are driven low. An output port pin which is driven low may act as a current sink for a respective plurality of LEDs attached to the pin thereby illuminating those LEDs.

5

In another embodiment of the invention the IC 4 may incorporate a delay which would allow the illuminated LEDs to remain illuminated for a finite amount of time after the motion switch 5 has changed state.

10 The IC 4 may be a standard LED driver circuit configured or programmed to illuminate the LEDs as described herein, or as desired, when the IC 4 is triggered.

Hereinafter, the motion sensing flashing device 1 is described as comprising a wearable band, being a cheerband 20. The device 1 is incorporated with a structure which
15 allows the device 1 to be secured to a body.

The cheerband 20 includes wires 21 connecting the first plurality of LEDs 6 and the second plurality of LEDs 7, in parallel, to the IC 4. It also includes an upper mould of a band 22, a resistor 23, a printed circuit board 25, a battery holder 24, a plurality of bonding
20 boards 28, a battery 2, a slide switch 3, a pin for the band 26 and a lower mould for the band 27.

In a preferred embodiment, the cheerband 20 would be secured to an arm or a wrist. In such an embodiment the mentioned arm or wrist would move intermittently. The
25 movement of the conducting sphere 14 inside the motion switch 5 is governed by the movement of the arm or wrist. Therefore, the rate at which the motion switch 5 changes state and thus, the rate at which the IC 4 illuminates the LEDs is directly dependent on the arm or wrist movements. The result is that the cheerband 20 effectively flashes in accordance with arm or wrist movement.

30

- 6 -

The preferred material of the upper mould of the band 22 and the lower mould of the band 27 is plastic, such as 'Louie Flex'. This material is a non-toxic PVC substitute.

5 The cheerband 20, in addition to the safety features it can provide, can also be used as a fashion accessory. The cheerband 20 can also be used at sporting events, particularly night sporting events, to highlight the movement of spectators' arms, particularly when cheering, applauding or being involved in a "Mexican Wave".


10 Many modifications will be apparent to those skilled in the art without departing from the scope of the present invention as herein described with reference to the accompanying drawings.

- 7 -

CLAIMS:

1. A flashing device comprising a wearable band having:
means for sensing movement of the band and generating a trigger signal in
5 response to said movement;
circuit means responsive to said trigger signal to generate an illumination signal;
and
at least one light which is illuminated in response to said illumination signal.
- 10 2. A flashing device as claimed in claim 1, wherein the band is worn on a user's head, neck, waist or arm, and movement of the user causes said at least one light to flash.
3. A flashing device as claimed in claim 2, wherein the movement means includes a motion switch having a conducting sphere movable in a space defined by a plurality of
15 conducting parts.
4. A flashing device as claimed in claim 3, wherein the trigger signal is generated when said sphere moves into contact with at least two of said parts.
- 20 5. A flashing device as claimed in claim 4, wherein the circuit means includes an integrated circuit connected to the motion switch and mounted on a printed circuit board integrated in the band.
6. A flashing device as claimed in claim 1, wherein said at least one light includes
25 LEDs distributed along said band.
7. A flashing device as claimed in claim 6, wherein the LEDs include at least two sets of LEDs which are alternately illuminated when said trigger signal is generated.

2/2

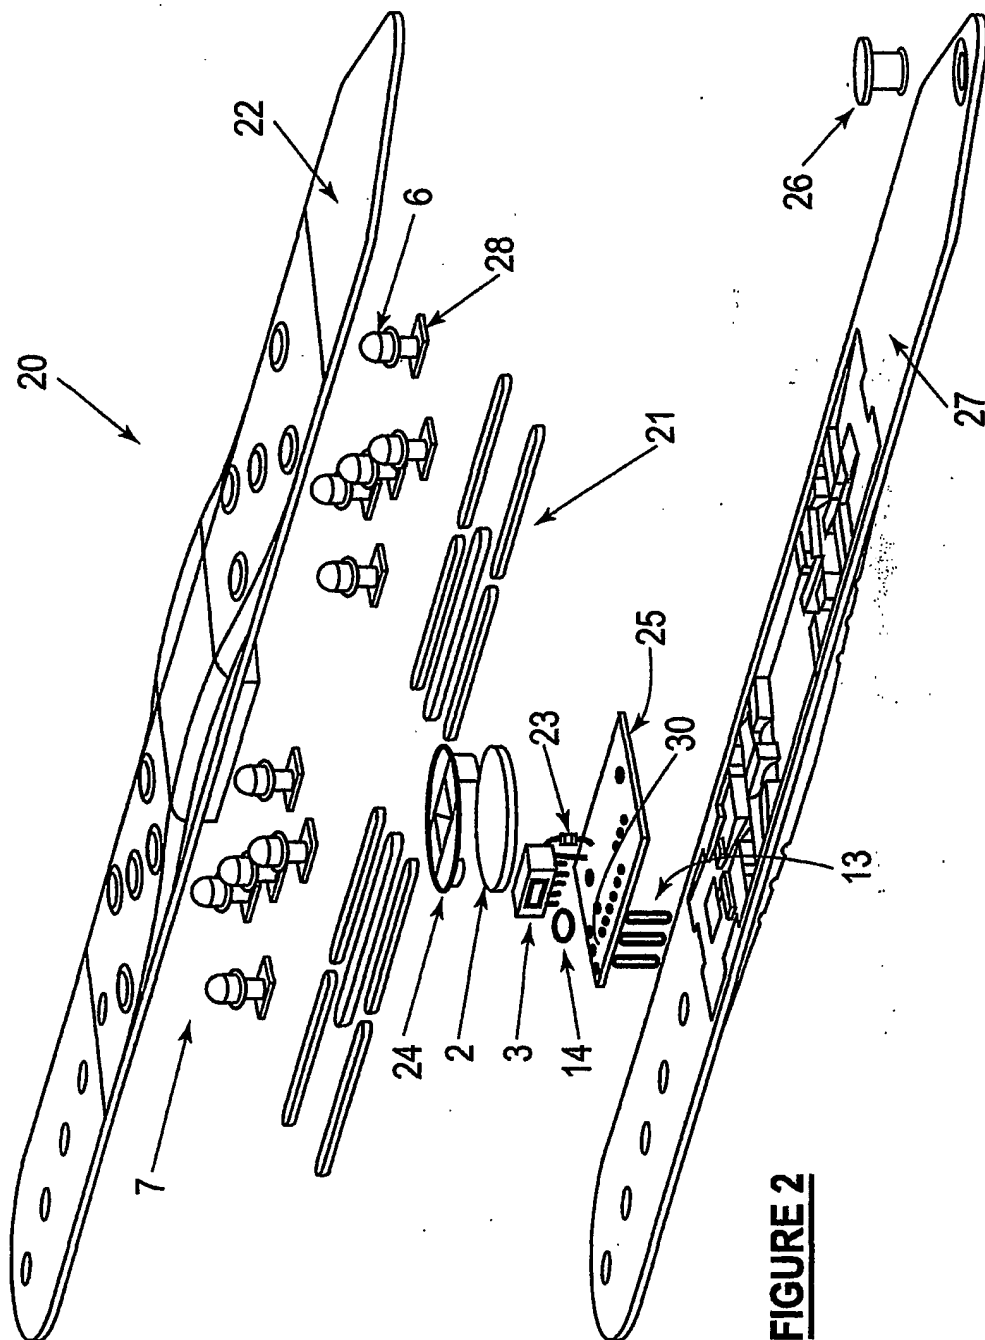

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU01/00180

A. CLASSIFICATION OF SUBJECT MATTERInt. Cl. ⁷: A44C 25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: F21, A41, PLUS KEYWORDS WITHOUT USING IPC

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

AU: IPC AS ABOVE,

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DWPI and JAPIO: (motion or movement) and wearable and (plurality or multiple or several) and (band or strap) and (lights or leds or led)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 4412205 A (VON KEMENCZKY) 25 October 1983 See whole document.	1 2,6,7
Y	US 4791536 A (JAMES) 13 December 1988 See whole document.	1,2,6,7
Y	CA 2024665 A (ROYAL EAGLE TECHNOLOGY INC) 6 March 1992 See whole document.	1,2,6,7

☐ Further documents are listed in the continuation of Box C
 ☒ See patent family annex

* Special categories of cited documents:

"A" document defining the general state of the art which is

not considered to be of particular relevance

"E" earlier application or patent but published on or after

the international filing date

"L" document which may throw doubts on priority claim(s)

or which is cited to establish the publication date of

another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition

or other means

"P" document published prior to the international filing date

but later than the priority date claimed

"T" later document published after the international filing date or

priority date and not in conflict with the application but cited to

understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot

be considered novel or cannot be considered to involve an

inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot

be considered to involve an inventive step when the document is

combined with one or more other such documents, such

combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 April 2001

Date of mailing of the international search report

30 APR 2001

Name and mailing address of the ISA/AU

 AUSTRALIAN PATENT OFFICE
 PO BOX 200, WODEN ACT 2606, AUSTRALIA
 E-mail address: pct@ipaustalia.gov.au
 Facsimile No. (02) 6285 3929

Authorized officer

SUSAN T. PRING

Telephone No : (02) 6283 2210

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU01/00180

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member
US	4412205	NONE
US	4791536	NONE
CA	2024665	NONE
		END OF ANNEX